



Sales Hotline +86-10-88861977 After Service Hotline +86-10-88861982

- HOME
- ABOUT PROSTAR
- NEWS
- PRODUCTS
- CASES
- MARKETING
- CUSTOM SERVICE
- COTNACT US

PRODUCTS

PRODUCTS

Category

| Home - Products - SOLAR...

AVR & TRANSFORMER

UPS

IPS & INVERTER

SOLAR

BATTERY & CHARGER

VFD & SOFT STARTER

Product Search

Enter keywords



== Products Navigation



倡导自然能源
支持绿色环保



70~95W solar panel

- Solar panel other product



SOLAR PANEL
PR-PV Series

PV Module PR[70~95] 12S

Aerospace style cell interconnects
with in-plane strain relief
advanced EVA encapsulation system
with multi-layer backsheet for long-term package durability
high reliability


Performance guarantee:
10 years (90% power output)
20 years (80% power output)
Details according to warranty issued by PROSTAR
Design life time: 25 years



Paramters

Model	PR70-12S	PR75-12S	PR80-12S	PR90-12S	PR95-12S
Dimension	1210x550mm				
Weight	9.6KGS	9.6KGS	9.6KGS	9.6KGS	9.6KGS
Cell Type	Mono	Mono	Mono	Mono	Mono
Maximum Power@STC(Pmax)	70Wp	75Wp	80Wp	90Wp	95Wp
Open-Circuit Voltage(Voc)	21.5V	21.6V	21.9V	22.3V	22.3V
Optimum Operating Voltage(Vmp)	17.1V	17.2V	17.3V	17.8V	17.1V
Short-Circuit Current(Isc)	4.52A	4.82A	4.98A	5.43A	5.73A
Optimum Operating Current(Imp)	4.09A	4.39A	4.63A	5.06A	5.34A
Temperature Coefficient of Pmax	-0.45%/°C	-0.45%/°C	-0.45%/°C	-0.45%/°C	-0.45%/°C
Temperature Coefficient of Voc	-0.37%/°C	-0.37%/°C	-0.37%/°C	-0.37%/°C	-0.37%/°C
Temperature Coefficient of Isc	+0.06%/°C	+0.06%/°C	+0.06%/°C	+0.06%/°C	+0.06%/°C


Physical Specifications

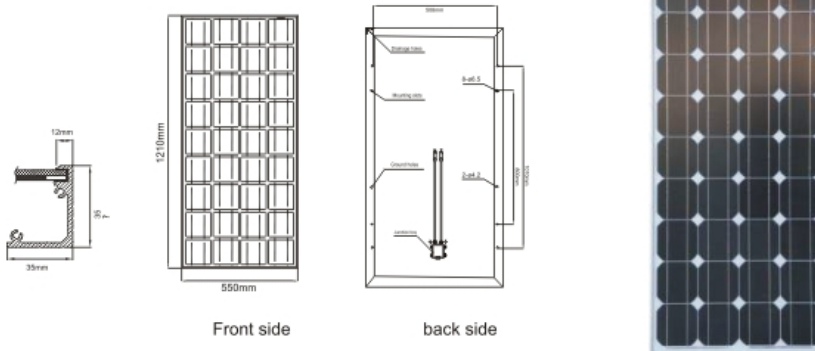

Copyright © 1987~2012 Beijing Prostar CO.,

Product Path: SOLAR > Solar panel > 70~95W solar panel

FAQ's | Honor | Network | Contact Us | Sitemap | Home |



POWERED BY ESHION MEDIA
www.eshion.cn

Copyright © 2009 Beijing Prostar International Electric Co., Ltd. All Rights Reserved. 京ICP备05000988号