



PR12-100DG is GEL deep cycle battery, with 12 years floating design life, superiorly designed for frequent cyclic discharge applications under extreme temperature. By using strong grid to insure reliable performance under frequent cyclic discharge use. 400 cycles could be available at 100% DOD. Offering extra-durable cyclic performance, high efficiency of recovery, that is more suitable for solar, mobility, E-toll, marine, deep discharge UPS etc.




Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	100Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 30.0 Kg
Max. Discharge Current	1000 A (5 sec)
Internal Resistance	Approx. 7.5 mΩ
Operating Temperature Range	Discharge: -40 Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	20A
Equalization and Cycle Service	14.2 to 14.4VDC/unit Average at 25°C
Self Discharge	PROSTAR batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F5/F12
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.




Dimensions


Unit: mm Dimension: 328(L) × 172(W) × 222(H)

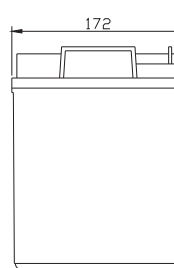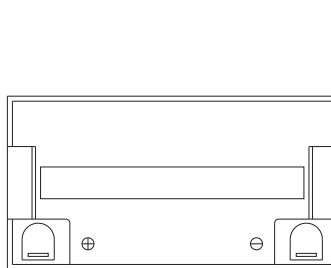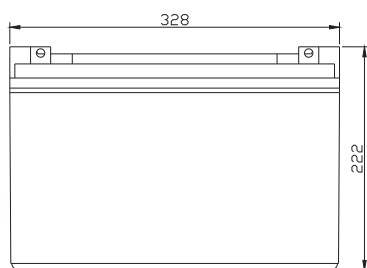

Terminal F12



Terminal F5



Constant Current Discharge Characteristics: A (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	315.38	225.99	164.44	103.22	58.344	33.307	23.427	19.388	16.327	11.269	9.5283	5.0390
10.0V	306.95	215.03	161.06	101.52	58.075	33.057	23.338	19.298	16.231	11.177	9.4367	4.9474
10.2V	289.24	207.44	158.53	100.62	57.536	32.806	23.158	19.209	16.135	11.086	9.3451	4.8558
10.5V	259.73	191.42	150.94	98.108	56.998	32.556	23.068	19.029	15.943	10.994	9.2534	4.7641
10.8V	234.43	174.56	139.14	93.799	55.651	31.972	22.440	18.580	15.655	10.811	9.1618	4.6725
11.1V	204.07	156.00	124.80	87.875	52.869	30.553	21.453	17.683	14.983	10.353	8.8870	4.3977

Constant Power Discharge Characteristics: W (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.6V	3286.4	2403.2	1769.4	1164.9	667.28	383.16	270.36	224.04	189.01	130.77	107.14	56.592
10.0V	3219.3	2295.4	1732.7	1150.4	664.04	381.66	269.82	223.50	187.86	130.22	106.04	56.043
10.2V	3038.9	2218.9	1709.1	1136.9	659.20	378.15	268.20	222.43	187.28	129.12	105.49	55.493
10.5V	2736.5	2050.3	1629.7	1111.0	652.73	374.64	266.59	220.81	185.56	128.02	104.39	54.944
10.8V	2461.5	1861.6	1497.4	1060.4	636.58	369.13	260.12	214.89	182.67	125.27	103.29	54.394
11.1V	2124.8	1653.3	1337.1	993.64	603.19	352.11	247.20	204.65	173.45	120.88	100.00	52.196

All mentioned values are average values.


Life characteristics of cyclic use

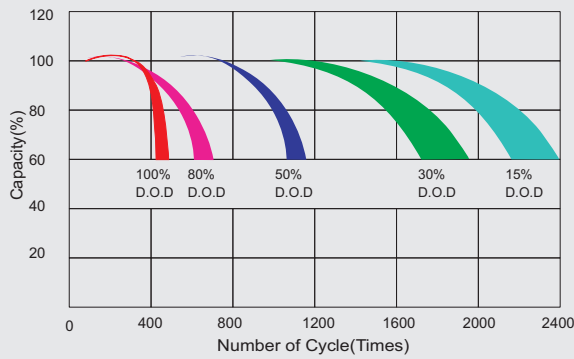


Storage characteristic

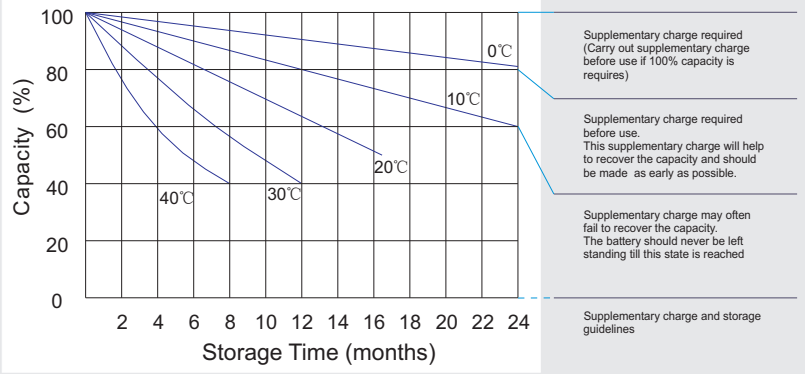

Charge characteristic Curve for standby use

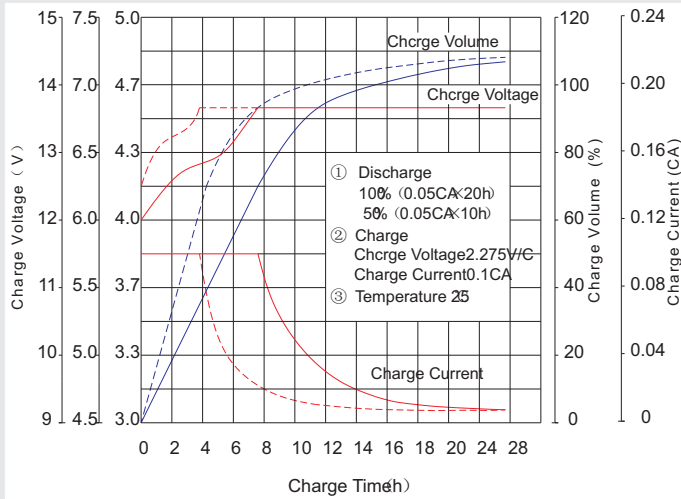

Discharge characteristic Curve

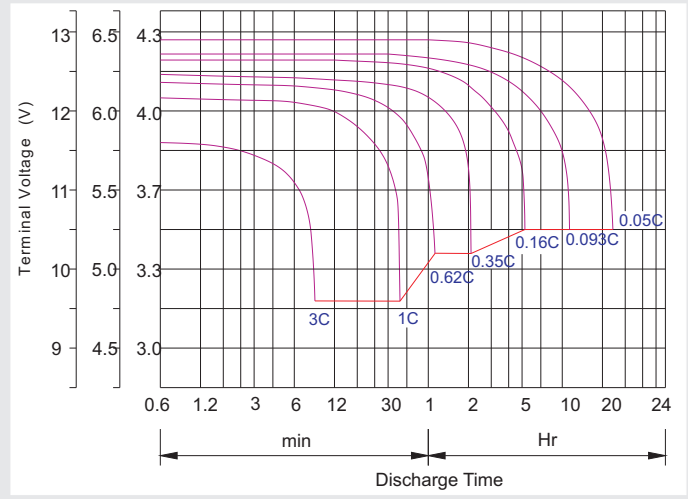

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: $-4mV/Cell$.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.

Charge the batteries at least once every six months, if they are stored at 25°C

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h